

GAS RANGES WITH GRIDDLE

Model	Product ID	Ovens	Burners	Griddle
TR2-G24-N	859634	1	2	24"
TR6-G24-N	859635	2	6	24"

STANDARD FEATURES

Top Burner

- Cast iron burners each giving off 30,000 BTU/hr
- 12" x 12" cast iron top grates are removable for easy cleaning
- Each burner has an individual standing pilot light
- Push-in chrome knob w/efficient Hi-Low burner system
- Removable crumb tray

Griddle

- 40,000 BTU/hr
- 3/4" thick griddle plate
- 4" welded griddle side shields
- Stainless steel U burner
- Heat every 6" — valve control every 12"
- Manual controls

Oven

- 30,000 BTU/hr total output
- Flame failure safety device
- Adjustable thermostat from 250°F to 550°F
- Steel liner on door & sides w/a nano porcelain oven liner
- (2) removable & adjustable oven racks per oven
- Cool to touch stainless steel oven door handles

Construction

- Stainless steel front, back, riser & shelf
- Spring loaded door w/cool to touch stainless steel oven door handle
- 6" stainless steel adjustable legs
- 3/4" NPT rear gas connection (**TR2-G24-N**)
- 1" NPT rear gas connection (**TR6-G24-N**)



TR6-G24-N




TR2-G24-N


Gas Regulator Included

- A pressure regulator is provided with this unit.
Natural Gas 4" W.C.
Propane Gas 10" W.C.
- Units supplied with LP conversion kit.
- Rear Gas Connections
(36" range) 3/4" NPT
(60" range) 1" NPT

TR2-G24-N

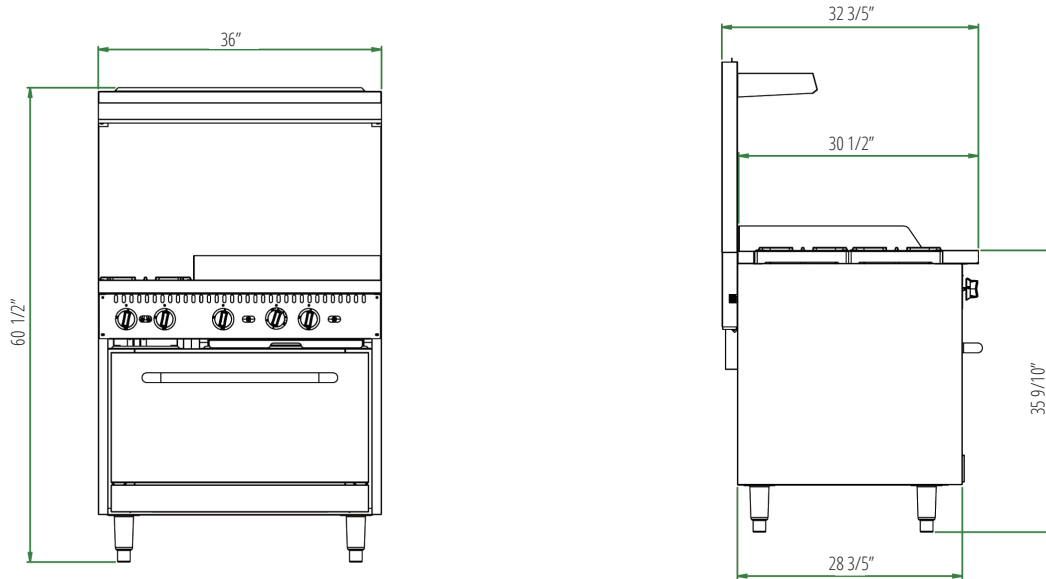

TR6-G24-N

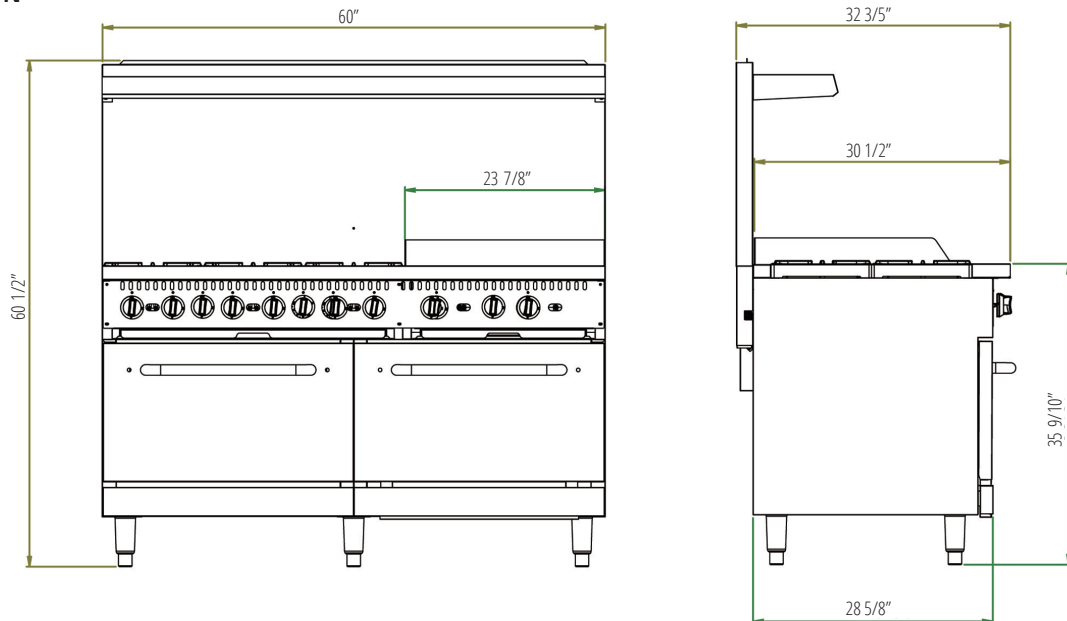

Model	Product ID	External Dimensions (in)			Internal Oven Dimensions (in)			BTU's (per open burner)	BTU's (per oven)	BTU's (griddle burner)	Total BTU's	Crated Weight (lbs)
		W	D	H	W	D	H					
TR2-G24-N	859634	36	32 3/5	35 9/10 + 24 3/5	26 7/8	25 4/5	13 4/5	30,000 x 2	30,000 x 1	20,000 x 1	130,000	507
TR6-G24-N	859635	60	32 3/5	35 9/10 + 24 3/5	26 7/8	25 4/5	13 4/5	30,000 x 6	30,000 x 2	20,000 x 2	280,000	816