




www.cambro.com



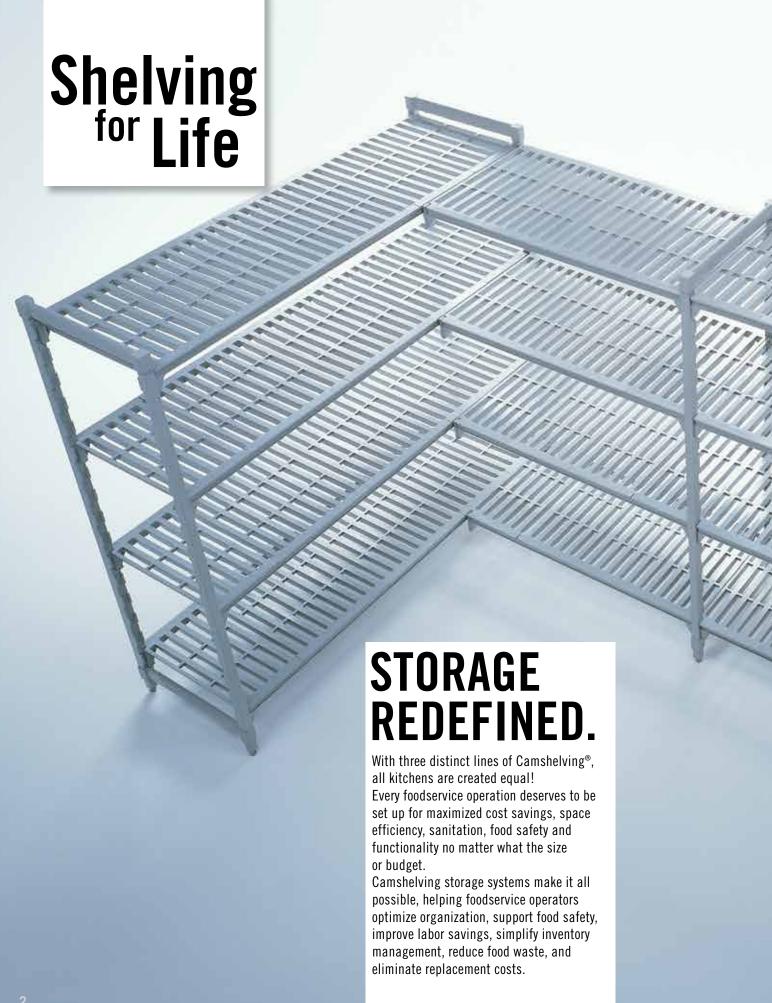

Cambro storage and transportation products that help ensure food safety handling.



COMPONENT

Products that meet the NSF International criteria for sanitation and cleanability.



Certifies products approved by Technischer Überwachungs-Verein. (Technical Inspection Association)

### HACCP

Products that help meet HACCP guidelines.



Fit for food products



Dishwasher Safe



Cadmium-free products



Recyclable polypropylene



Antimicrobial protection permanently molded into shelf plates to inhibit the growth of mold, fungus and bacteria.

**CAMSHELVING®** key features

06 COMPARISON quick reference guide

PRODUCT CODE reference guide

**OVERALL LENGTH** quick reference guide

12

PREMIUM series

26 ELEMENTS series

36 BASICS series

Camshelving® is covered under the following US Patents:

D498,664 S, D508,646 S, D512,867 S, D623,929 S, D624,764 S, D648,582 S, D630,935 S, D648,159 S, D651,433 S, D648,160 S, D697,391 S, D727,715 S, D728,347 S, D728,348 S, D707,994 S, D739,989 S, D663,912 S, D736,488 S, D739,989 S, US 6,981,454B2

# CAMSHELVING

THE COMMON AND KEY FEATURES OF ALL CAMSHELVING SERIES

### Rust and Corrosion Free


Backed by a lifetime warranty against rust and corrosion, Camshelving storage systems eliminate the inconvenience and costs associated with restoring or replacing degraded shelving. Only Cambro offers Shelving for Life.



### Multi Environment Use

Camshelving storage systems are designed to withstand all extreme storage applications and temperatures — impervious to moisture, chemicals, salt, food acids, and humidity. Camshelving systems can be installed anywhere and will never rust.

-36°F TO 190°F

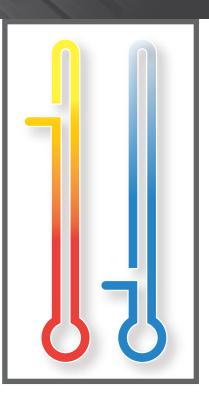


## **Maximized Space Utilization**

Components have been thoughtfully designed to maximize storage space, even in space-restricted areas.



Starter Unit



## PREMIUM series

## ELEMENTS series

## BASICS series

## Easy to Clean


Cleaning shelving shouldn't be a major production. Whether daily or scheduled, cleaning can be done quickly and easily without interrupting storage space or normal, day-to-day operations.



## Easy to Adjust

Each shelf can be easily and independently adjusted to accommodate a variety of storage products and packages as product and storage needs change.



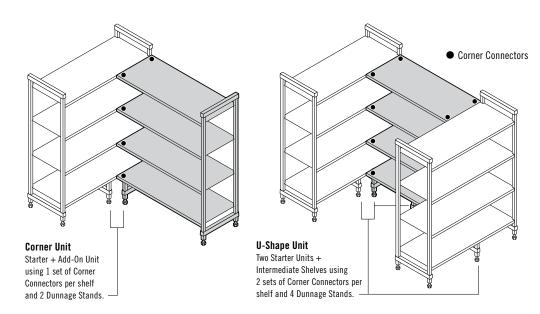

### Corner Shelf Space

Convert unusable space into continuous, easy-access storage areas using corner connectors.

## Camshelving® Series Quick Reference Guide

Cambro offers three rust-free, non-corrosive, hygienic shelving systems that will hold up to the tough demands of commercial foodservice operations. This guide will help you choose the ideal Camshelving system for each storage area in your operation. Only Cambro offers Shelving for Life.



YES



	ANTIMICROBIAL SHELP PLATES
	PREMIUM series
Storage Areas	High-volume foodservice operations with constant loading and off-loading of heavy products. Frequent and/or multiple daily deliveries.  Wet Storage - Walk-in Freezers, Coolers, Warewashing Areas  Dry Storage - Bulk Foods, Catering Equipment, China/Dishware,  Linen, Merchandising.
Recommended Market Segments	Hotels and Casinos, Restaurants, Quick-Serve Restaurants, Schools, Colleges and Universities, Healthcare, Military, Convention Centers/Stadiums, Cruise Ships, Caterers and Banquet Centers, Corporate Dining, Convenience and Grocery Stores.
Product Material	Posts and traverses are made from a steel core with smooth polypropylene exterior. Superior strength and durable enough to withstand the heaviest loading demands.
Assembly	Molded in dovetails means fewer parts, making it the easiest to assemble.
Weight-Bearing Capacity (based on 24"- 48" length)	Stationary Unit: 800 lbs. per shelf, 3200 lbs. per unit.  Mobile Unit: 750 lbs. per unit.  Corner and U-Shape Unit: 400 lbs. per shelf, 1600 lbs. per unit.
Lifetime Warranty Against Rust & Corrosion	Shelf Plates, Stationary Posts and Traverses
Shelf Lengths	24", 30", 36", 42", 48", 54", 60", 72"
Shelf Depths	14", 18", 21", 24"
Post Heights	<b>Stationary:</b> 32", 56", 64", 72", 84" <b>Mobile:</b> 35", 59", 67", 75" (includes casters)
Mobile Units	YES
High Density Storage Floor Track System	YES
Bottom Shelf Dunnage Stand	YES
Shelf Rails	YES
Vertical Drying and Storage Cradle (Trays / Cutting Boards / Lids)	YES
Dome Drying and Storage Cradle	YES
Angled Drying and Storage Cradle	YES
Shelf Divider (Narrow Item Storage)	YES
Shelf Divider Bar (for Food Pans or Food Boxes)	YES
Tray Sliding Rack	YES
Single Shelf Security Cage	YES
Full Wasa Cassuita Oans	VEC

**Full Wrap Security Cage** 











ELEMENTS series	BASICS series		
High-volume foodservice operations with constant loading and off-loading of medium to heavy products. 5-7 deliveries per week.  Wet Storage - Walk-in Freezers, Coolers, Warewashing Areas  Dry Storage - Bulk Foods, Catering Equipment, China/Dishware,  Linen, Merchandising.	Medium-volume foodservice operations with constant loading and off-loading of light to medium products. 2-5 deliveries per week.  Wet Storage - Walk-in Freezers, Coolers, Warewashing Areas  Dry Storage - Bulk Foods, Catering Equipment, China/Dishware,  Linen, Merchandising, Disposables.		
Hotels and Casinos, Restaurants, Quick-Serve Restaurants, Schools, Colleges and Universities, Healthcare, Military, Convention Centers/Stadiums, Cruise Ships, Caterers and Banquet Centers, Corporate Dining, Convenience and Grocery Stores.	Hotels and Casinos, Restaurants, Quick-Serve Restaurants, Schools, Colleges and Universities, Healthcare, Convention Centers/Stadiums, Caterers and Banquet Centers, Corporate Dining, Convenience Stores, Yogurt Shops and Cafés.		
Posts and traverses are made from a revolutionary composite material that is light in weight yet strong enough to withstand rigorous loading conditions.	Posts and traverses are made from the same revolutionary composite material as Elements Series.  Slim design is lighter in weight, yet durable and strong enough to withstand a wide variety of storage conditions.		
Easy to assemble.	Easy to assemble.		
Stationary Unit: 800 lbs. per shelf, 3200 lbs. per unit.  Mobile Unit: 750 lbs. per unit.  Corner and U-Shape Unit: 400 lbs. per shelf, 1600 lbs. per unit.	Stationary Unit: 600 lbs. per shelf, 2200 lbs. per unit.  Corner and U-Shape Unit: 300 lbs. per shelf, 1200 lbs. per unit.		
Shelf Plates, Posts and Traverses	Shelf Plates, Posts and Traverses		
24", 30", 36", 42", 48", 54", 60", 72"	30", 36", 42", 48", 54", 60"		
14", 18", 21", 24"	18", 21", 24"		
Stationary: 64", 72", 84"  Mobile: 70", 78" (includes casters)	<b>Stationary:</b> 64", 72", 84"		
YES	NO		
NO	NO		
YES	YES		
NO	NO		
YES	NO		
NO	NO		

### **Product Code Reference Guide**

Cambro's new product codes have been simplified making it easier to identify the type of unit or accessory required. Code numbers are composed of 3 parts.


- 1. **Prefix** Defines the shelving brand and type of unit being selected.
- 2. Dimensions Identifies the depth, length and height.
- 3. **Suffix** Type and quantity of shelves.

### **Complete Units**

CP	Camshelving® Premium Series	PREFIX	
CP <b>U</b>	Stationary Starter Unit		
CPA	Stationary Add-On Unit —	CPU	18
CP <b>MU</b>	Mobile Unit		
CP <b>HU</b>	High Density Mobile Unit		<b>D</b> EPTH
E	Camshelving Elements Series		

- **ESU** Stationary Starter Unit EA Stationary Add-On Unit
- EMU Mobile Unit
- C B Camshelving Basics Series
- CB**U** Stationary Starter Unit
- CBA Stationary Add-On Unit





**L**ENGTH

V4 4 Vented Shelves

5 Vented Shelves

4 Solid Shelves

5 Solid Shelves

3 Vented Shelves + VS4 1 Solid Shelf

VS5 4 Vented Shelves + 1 Solid Shelf

V4PKG\* 4 Vented Shelves

V5PKG\* 5 Vented Shelves


S4PKG\* 4 Solid Shelves

S5PKG\* 5 Solid Shelves

VS4PKG\* 3 Vented Shelves + 1 Solid Shelf

VS5PKG\* 4 Vented Shelves + 1 Solid Shelf

### **Post Kits and Shelf Kits**

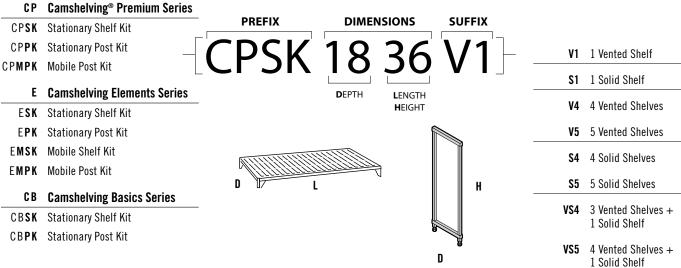

<b>V</b> 1	1 Vented Shelf
\$1	1 Solid Shelf
V4	4 Vented Shelves
V5	5 Vented Shelves
\$4	4 Solid Shelves
\$5	5 Solid Shelves
VS4	3 Vented Shelves + 1 Solid Shelf
VS5	4 Vented Shelves +

#### **Accessories**

If an accessory is used by more than 1 line of shelving, the code will start with CS.

If an accessory is only used in one line of shelving, the code will start by the prefix letters of the line.

**Example: Corner Connectors:** 

- a. **CP**CC1 = Camshelving Premium Corner Connector Set
- b. ECC1 = Camshelving Elements Corner Connector Set
- c. **CB**CC1 = Camshelving Basics Corner Connector Set

<sup>\*</sup> Premium Series only - 84" high units and 72" long units, all heights.


## FREE Camshelving® Design Service

In order to select the most suitable and cost effective storage system, Cambro offers customized shelving illustrations using our proprietary shelving design program. Space allocation, operational flow and organizational challenges are quickly addressed when selecting the right product for the storage application. Usable storage space is maximized using the least number of units to help operators manage equipment costs. Once all required information is received, our expert shelving consultants prepare a 2D and 3D recommended floor plan along with an itemized product list by room/area. Proposals are completed and emailed within 24-48 business day hours, depending on number of rooms and complexity. We look forward to designing the perfect storage solution for you. Call or email today to connect with one of our Camshelving consultants.

Email **shelving@cambro.com** or call **TOLL FREE (877) 737-0663**.


## It's Simple! To Get Started, Please Provide:

- Project Name
- Storage Room Type (freezer / cooler)
- Room(s) Dimensions (L x W x H)
- Doorway / Entryway Location & Dimension
- Obstructions (condenser / pipes)
- Additional Preferences / Requirements

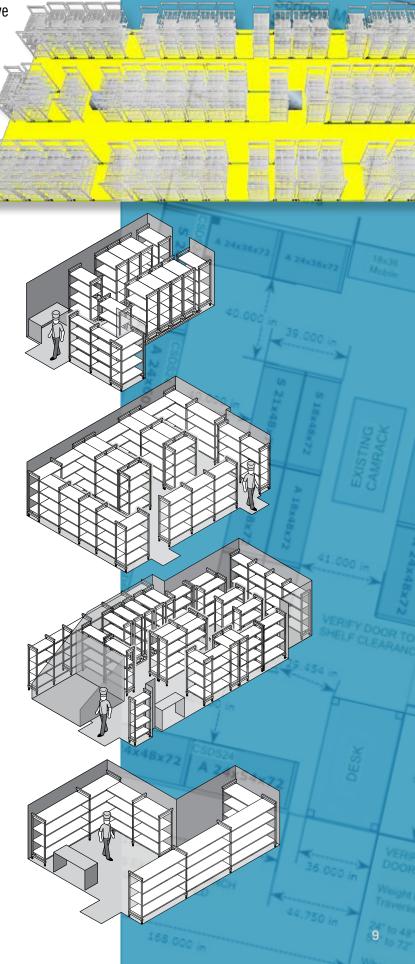


## Camshelving® Series Overall Length - Quick Reference Guide


**Straight Unit:** Starter Unit + Add-On Unit with Shared Posts







### **Corner Unit:** Starter Unit + Add-On Unit with Corner Connectors





### **U-Shape Unit:** Two Starter Units + Intermediate Shelves with Corner Connectors





### **Straight Unit:** Starter Unit + Add-On Unit with Shared Posts

### PREMIUM / BASICS SERIES

STARTER Unit actual Length		ADD-ON Unit actual Length		OVERALL Length
24"	+	221/4"	=	46¼"
30"	+	281/4"	=	58¼"
36"	+	341/4"	=	701/4"
42"	+	401/4"	=	821/4"
48"	+	461/4"	=	941/4"
54"	+	521/4"	=	1061/4"
60"	+	581/4"	=	1181/4"
72"	+	701/4"	=	1421/4"
	24" 30" 36" 42" 48" 54" 60"	24" + 30" + 36" + 42" + 48" + 54" +	UNIT ACTUAL LENGTH	UNIT ACTUAL LENGTH  24" + 22½" =  30" + 28½" =  36" + 34½" =  42" + 40½" =  48" + 46½" =  54" + 52½" =  60" + 58½" =

24" and 72" are not available in Camshelving Basics Series							
	2/1" and 72"	ara not	aldelieve	in	Camchalving	Racine	Spring

### **ELEMENTS SERIES**

STARTER Unit actual Length		ADD-ON Unit actual Length		OVERALL Length
24"	+	22"	=	46"
30"	+	28"	=	58"
36"	+	34"	=	70"
42"	+	40"	=	82"
48"	+	46"	=	94"
54"	+	52"	=	106"
60"	+	58"	=	118"
72"	+	70"	=	142"

### Corner Unit: Starter Unit + Add-On Unit with Corner Connectors

=

## PREMIUM / ELEMENTS / BASICS SERIES ADD-ON Unit actual Length

ADD-ON Unit

30"

36"

42"

48"

23"

29"

35"

41"

47"

+

PREMIUM / ELEMENTS / BASICS SERIES							
ADD-ON Unit ad Length	CTUAL	21" STA Unit di		OVERALL LENGTH			
23"	+	21"	=	44"			
29"	+	21"	=	50"			
35"	+	21"	=	56"			
41"	+	21"	=	62"			
47"	+	21"	=	68"			

### PREMIUM / ELEMENTS / BASICS SERIES

ΠΔΙ	0.411.074			
ADD-ON Unit actual Length		NIT ACTUAL 24" STARTER		OVERALL Length
+	24"	=	47"	
+	24"	=	53"	
+	24"	=	59"	
+	24"	=	65"	
+	24"	=	71"	
	+ + + + + +	+ 24" + 24" + 24" + 24"	+ 24" = + 24"	

18" STARTER Unit Depth

18"

18"

18"

18"

18"

### **U-Shape Unit:** Two Starter Units + Intermediate Shelves with Corner Connectors

OVERALL Length 41"

47"

53"

59"

65"

### PREMIUM / ELEMENTS / BASICS SERIES

INTERMEDIATE SHELF	INTERMEDIATE Shelf actual Length		18" DEI Starte Unit A-	R	OVERALL Length
36"	34"	+	36"	=	70"
42"	40"	+	36"	=	76"
48"	46"	+	36"	=	82"

### PREMIUM / ELEMENTS / BASICS SERIES

INTERMED Shelf act Length		21" DEPTH Starter Unit A+B		OVERALL Length
34"	+	42"	=	76"
40"	+	42"	=	82"
46"	+	42"	=	88"

#### PREMIUM / ELEMENTS / BASICS SERIES

INTERMEDI SHELF ACT LENGTH		24" DEP Starter Unit A+	₹	OVERALL Length
34"	+	48"	=	82"
40"	+	48"	=	88"
46"	+	48"	=	94"

<sup>24&</sup>quot; unit not available in Camshelving Basics Series.

## CAMSHELVING PREMIUM series

## WHY CHOOSE PREMIUM?

In high volume foodservice operations with frequent deliveries and constant loading and off-loading of products, stability, strength and sanitary storage should never be compromised. Premium Series does precisely what it was designed to do — hold the heaviest products with the roughest handling, in any environment and it is the easiest to clean and adjust.



All Environments
-36°F TO 190°F

**Stationary** 

**High Density** 

**Mobile** 

camguard

ANTIMICROBIAL SHELF PLATES



















Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, Identification Tags, Full Wrap Security Cage, Single Shelf Security Cage, Tray Slide Rack, Shelf Rails, Shelf Divider Bars, High Density Track and Extension Kits are not NSF Listed.

storage needs **HEAVY** 


daily deliveries

**FREQUENT** 


### **Camshelving® Premium Series**

## **Stationary Unit Sizes**

### **Mobile Unit Sizes**

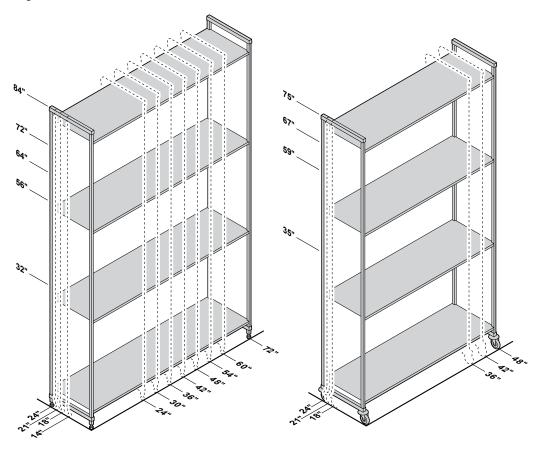

### **4 Shelf Unit Weight Bearing Chart**

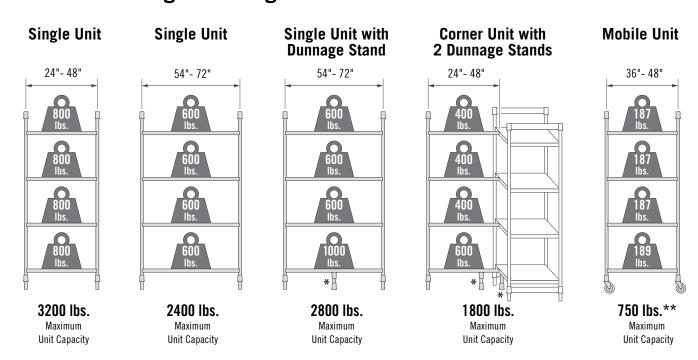

<sup>\*</sup> Dunnage Stands add stability and increase weight bearing capacity on bottom shelf only. Add to any shelf length. Highly recommended for Starter Units 54" and longer, all Corner Units, U-Shape Units and units specified for heavier loads (See page 10).

<sup>\*\*</sup> Due to the weight bearing capacity of casters, maximum weight load on an entire Mobile Unit is 750 lbs.

### Camshelving® Premium Series

### Starter, Add-On and Mobile Units


These units make ordering easy and save time and labor during installation. Units ship complete in one box.\* Post kits are pre-assembled at the factory, speeding up on site set up.

\*Due to unit weight and size, all 84" high units and 72" long units, all heights, ship in multiple boxes of post kits (unassembled) and shelf kits.



### 4-Shelf Vented Stationary Starter and Add-On Units

Starter units include 2 factory assembled post kits and shelves. Add-On units include 1 factory assembled post kit and shelves.



пенапта	DELIUS	LENGIR	13
3	3	8	
64"	18"	24" 4	18"
72"	21"	30" 5	54"
84"	24"	36" 6	30"
		42"	72"

64" and 72" units ship in

72" long & 84" high Add-on units ship in



72" long & 84" high Starter units ship in



### 4-Shelf Solid Stationary Starter and Add-On Units

Starter units include 2 factory assembled post kits and shelves. Add-On units include 1 factory assembled post kit and shelves.



HEIGHTS	DEPTHS	LENGTHS
3	3	8
64"	18"	24" 48"
72"	21"	30" 54"
84"	24"	36" 60"
		42" 72"

72" long & 84" high 64" and 72" units ship in Add-on units ship in



72" long & 84" high Starter units ship in

LENCTHO



### 4-Shelf Vented and Solid Stationary Starter and Add-On Units (3 vented + 1 solid)

Starter units include 2 factory assembled post kits and shelves. Add-On units include 1 factory assembled post kit and shelves. Install solid shelf on bottom to prevent water/cleaning solutions from sloshing up onto stored products. Install solid shelf on top to protect product stored on lower shelves from condensation in cooler.




64" and 72" units ship in	

псівпіз	νεγιπο	LENGINS
3	3	8
64"	18"	24" 48"
72"	21"	30" 54"
84"	24"	36" 60"
		42" 72"

72" long & 84" high Add-on units ship in

**UEICUTO** 



### 5-Shelf Vented Stationary Starter and Add-On Units

Starter units include 2 factory assembled post kits and shelves. Add-On units include 1 factory assembled post kit and shelves.



HEIGHTS	DEPTHS	LENGTHS
3	3	8
64"	18"	24" 48"
72"	21"	30" 54"
84"	24"	36" 60"
		42" 72"

72" long & 84" high Add-on units ship in



72" long & 84" high Starter units ship in



### 5-Shelf Solid Stationary Starter and Add-On Units

Starter units include 2 factory assembled post kits and shelves. Add-On units include 1 factory assembled post kit and shelves.



HEIGHT	DEPTHS	LENGTHS
1	3	8
84"	18" 21"	24" 48" 30" 54"
	24"	36" 60"
		42" 72"



84" Starter units ship in



### 5-Shelf Vented and Solid Stationary Starter And Add-On Units (4 vented + 1 solid)


Starter units include 2 factory assembled post kits and shelves. Add-On units include 1 factory assembled post kit and shelves. Install solid shelf on bottom to prevent water/cleaning solutions

from sloshing up onto stored

products. Install solid shelf on top to protect product stored on lower shelves from condensation in cooler.



HEIGHT	DEPTHS	LENGTHS
1	3	8
84"	18" 21" 24"	24" 48" 30" 54" 36" 60" 42" 72"








### 4 or 5-Shelf Vented Mobile Starter Units

Mobile starter units include 2 factory assembled mobile post kits, shelves and 4 premium swivel casters with total locking brake.



HEIGHTS*	DEPTHS	LENGTHS
2	3	3
67"	18"	36"
75"	21"	42"
* Includes 5" casters.	24"	48"





Visit the Camshelving Microsite at www.cambro.com/camshelving for product information and pricing on ALL available shelving products. View or download the Camshelving Specification and Price List. Or scan QR code.



## **Camshelving® Premium Series Components**

### **Stationary Post Kits**

Post kit includes 2 unassembled stationary posts and 1 top and bottom post connector.

Stationary Posts cannot be used to build Mobile Units.



HEIGHTS	DEPTHS
5	3
32"	18"
56"	21"
64"	24"
72"	
84"	



### **Mobile Post Kits**

Mobile post kit includes 2 unassembled mobile posts, 1 top and bottom post connector and 2 premium swivel casters with total locking brake.

Mobile Posts cannot be used to build Stationary Units.



HEIGHTS*	DEPTHS
4	3
35"	18"
59"	21"
67"	24"
75"	

<sup>\*</sup> Includes 5" casters.



### **Vented and Solid Shelf Kits**

For stationary or mobile units. Available as a single shelf kit or in kits of 4 or 5 shelves in 1 box, all sizes. Each kit includes shelf traverses and vented or solid shelf plates.



DEPTHS	LENG	GTHS
3		3
*18"	24"	*48"
*21"	30"	54"
*24"	*36"	60"
	*42"	72"

<sup>\* 4</sup> or 5 shelf kits available in these sizes only.



### **Shelf Traverses**

Available in single or double packs. Use a single set to add an open shelf for divider bars or drying racks. Add single traverses onto back posts for extra support when placing rolling equipment under the first shelf.



Ü	e Pack GTHS	Double Pack LENGTHS
	8	5
24"	48"	36"
30"	54"	42"
30" 36"	54" 60"	42" 48"
	• •	

**PREMIUM** 

### **Bottom Shelf Dunnage Stands**

Increase weight bearing capacity on bottom shelf only. Add to any shelf length. Highly recommended for starter units 54" and longer and all corner units, intermediate units and units specified for heavier load volume on and off bottom shelves.







### **Corner Connectors**

Unique patented design ensures maximum shelf space utilization. Use 1 set per shelf to connect starter and add-on units in corners. Connect 4

or 5 intermediate shelves between 2 starter units (2 sets required per shelf). Available as a single set or 8 or 10 set packs.





### **Identification Tags**

Clip onto shelf traverses to clearly identify stored product. Made of highly durable plastic with a clear slide in front panel. Labels included.







### **Wall Fastener**

Use to secure stationary shelving unit to a wall for added safety and stability where required. Made of stainless steel. Screws not included.





### **Seismic Foot**

Secure stationary unit posts directly to the floor for added safety and stability where required. Made of stainless steel. Bolts not included.





### **Premium Caster**

Ideal in all areas of storage, especially coolers, freezers and/or wet areas. Made of highly durable, non-corrosive plastic with a 5" swivel, non-marking thermoplastic rubber wheel. Total locking brake locks both swivel motion and the wheel.





### **Donut Bumper**

Offers added protection during transport and when maneuvering mobile units into place against walls or alongside other units for storage.







### **Shelf Divider**

Stack and separate items stored on shelves. Made of highly durable ABS plastic. Installs directly onto solid or vented shelves. Easily removable for relocating or washing.

HEIGHT	DEPTHS
1	3
8"	18"
	21"
	24"





### **Shelf Divider Bars**

Create a custom service or storage station for food pans, boxes or dish racks. Install straight or angled dividers directly onto shelf traverses.





### **Shelf Rails**

Install onto traverses and dovetails to prevent items from falling off sides and ends of shelves. Choose from single or double rail side kits and double rail only end kits.

DEPTHS	LENG	THS
4	8	
14"	24"	48"
18"	30"	54"
21"	36"	60"
24"	42"	72"



4" High Double Rail



2" High Single Rail






End Rail



Holds up to 6 each full size (1826) or 12 half size (1318) sheet pans or trays. Install 1 or more units onto vented shelves, any length. High quality, lightweight aluminum material is safe for use in coolers and freezers. Made from aluminum 6463 (6000 series).







### **Single Shelf Security Cage**

Securely store valuable products on a single shelf. Made of heavy duty, 304 stainless steel for use in any environment. Requires 18" height between shelves. Install on vented shelves only. Lock not included.

DEPTH	LENGTH
1	1
24"	42"



### **Full-Wrap Security Cage**

Store valuable products behind locked doors. Made of heavy-duty 304 stainless steel for use in any environment. Stationary or mobile units ship complete with factory assembled post kits, 2 vented shelves, 4 premium swivel casters with total locking brake for mobile unit and 1 full wrap security cage. Assembly required. Lock not included.

Stationary	Mobile		
HEIGHT	HEIGHT*	DEPTH	LENGTH
1	1	1	1
64"	67"	24"	48"

<sup>\*</sup> Includes 5" casters.







### **Vertical Drying and Storage Cradle**

Modular 7-slot rack designed for drying and storing trays, sheet pans, cutting boards and lids. Installs directly onto shelf traverses. Made of highly durable ABS plastic. Available in single or 3 pack.





### **Vertical Drying and Storage Rack**

Promotes sanitary drying, safe handling and efficient product organization with easy access to product.

Units ship complete with factory assembled mobile post kits, 6 traverses, 12 or 15 vertical drying cradles and premium swivel casters with total locking brake. Assembly required.

HEIGHT*	DEPTH	LENGTHS	HOLDS
1	1	2	Trays
75"	24"	48"	84
* Includes 5" caster	S.	60"	105










### **Dome Drying and Storage Cradle**

Use to dry and safely store up to 10 patient meal delivery domes or plate covers upright. Installs directly onto shelf traverses. Made of highly durable ABS plastic. Available in single or 5 pack.





### **Dome Drying and Storage Rack**

Promotes sanitary drying, safe handling and efficient product organization with easy access to product.

Unit ships complete with factory assembled mobile post kits, 10 traverses, 10 dome drying cradles and premium swivel casters with total locking brake. Assembly required.

1	1	1	Domes	
HEIGHT*	DEPTH	LENGTH	HOLDS	

<sup>\*</sup> Includes 5" casters.








### **Angled Drying and Storage Cradle**

Uniquely designed cradle holds up to 8 each meal delivery pellets. Also can be used to dry, store and transport food pans and other commercial kitchen ware. Installs directly onto shelf traverses. Made of highly durable ABS plastic. Available in single or 4 pack.





### **Angled Drying and Storage Rack**

Promotes sanitary drying, safe handling and efficient product organization with easy access to product.

Unit ships complete with factory assembled mobile post kits, 8 traverses, 16 angled drying cradles and premium swivel casters with total locking brake. Assembly required.





## Camshelving® Premium Series

### **High Density Storage Floor Track System**

Maximize storage capacity by creating storage aisles in available space. This simple system is composed of stationary starter units anchored to a raised floor track system at both ends with high density mobile units installed in between. Easy to install track requires no drilling or gluing.



High Density Mobile Units are available with factory assembled post kits, vented or solid shelves and high density casters and bumpers. Full track and extension kits ship complete with required hardware. Stationary Starter Units are required to anchor the system at both ends.



Raised Floor Track provides a smooth and level surface to easily roll mobile units. Raised track ensures dirt will not get trapped and is easy to clean. Aluminum track and stainless steel hardware are rust resistant.


\* It is recommended to use a stationary unit for every 15'



Grooved casters roll




Raised track connects

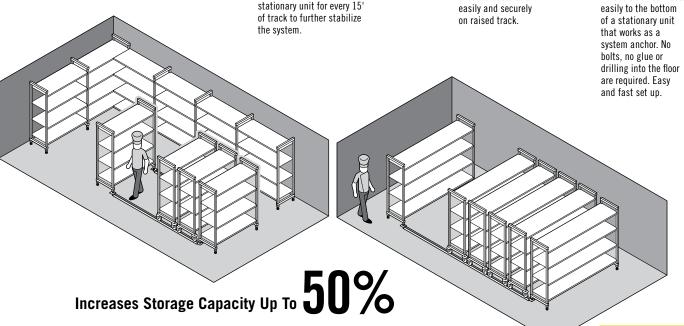

### **4-Shelf Vented High Density Mobile Starter Units**

Units include 2 factory assembled mobile post kits, 4 shelves, 4 high density casters and 4 high density bumpers.




HEIGHTS*	DEPTHS	LENGTHS
2	2	5
67"	18"	36"
75"	21"	42"
* Includes 5" casters	24"	48"
iliciades 5 casters	•	54"
		60"



### **4-Shelf Solid High Density Mobile Starter Units**

Units include 2 factory assembled mobile post kits, 4 shelves, 4 high density casters and 4 high density bumpers.



HEIGHTS*	DEPTHS	LENGTHS
2	2	5
67"	18"	36"
75"	21"	42"
*	24"	48"
* Includes 5" casters	i.	54"
		60"



### **Full Track and Extension Kits**

Aluminum raised track kits and track extensions ship complete in 1 box. Each kit includes all stainless steel hardware necessary to complete a floor installation.

It is highly recommended to install a stationary starter unit every 15' of track to further stabilize the system.



Full Track	Track Extension
LENGTHS	LENGTHS
3	3
10'	4.5'
12'	5'
14.5'	6'





### **High Density Caster with Donut Bumper**

Grooved caster rolls easily and securely on raised track. Donut bumper protects mobile units from coming into direct contact with each other.







## CAMSHELVING ELEMENTS series

## WHY CHOOSE ELEMENTS?

Made from a revolutionary, extremely strong composite material with a smooth, easy to clean surface. Elements Series is stronger than common wire shelving. It's lighter in weight than Camshelving Premium Series and totally impervious to moisture, chemicals and liquids that can destroy shelving over time. Elements Series is designed for medium to heavy storage use in freezers, coolers, dry storage or warewashing areas. It easily supports the performance demands of a busy foodservice operation.



All Environments
-36°F TO 190°F

**Stationary** 

**Mobile** 

camguard

ANTIMICROBIAL SHELF PLATES

















Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, Identification Tags, Single Shelf Security Cage, Tray Slide Rack, and Shelf Divider Bars are not NSF Listed.

storage needs

**MEDIUM** to **HEAVY** 

weekly deliveries


5 - 7






## **Stationary Unit Sizes**

### **Mobile Unit Sizes**

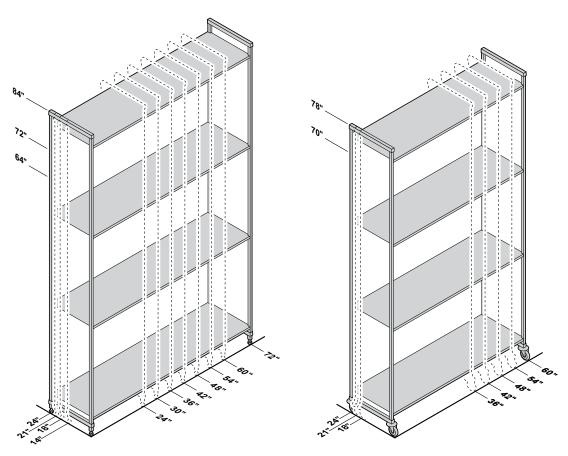

## 4 Shelf Unit Weight Bearing Chart

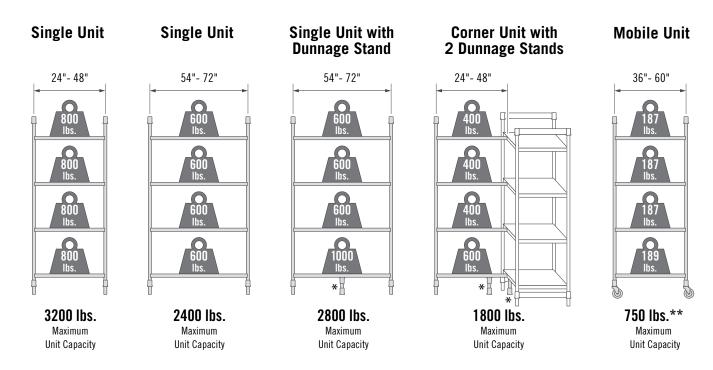

<sup>\*</sup> Dunnage Stands add stability and increase weight bearing capacity on bottom shelf only. Add to any shelf length. Highly recommended for Starter Units 54" and longer, all Corner Units, U-Shape Units and units specified for heavier loads (See page 10).

<sup>\*\*</sup> Due to the weight bearing capacity of casters, maximum weight load on an entire Mobile Unit is 750 lbs.

## **Camshelving® Elements Series**


### Starter, Add-On and Mobile Units

These units make ordering easy and saves time and labor during installation. Units ship complete in one box. Post kits are pre-assembled at the factory, speeding up on site set up.



### 4-Shelf Vented Stationary Starter and Add-On Units

Starter units include 2 factory assembled post kits and shelves. Add-On units include 1 factory assembled post kit and shelves.




HEIGHTS	DEPTHS	LENGTHS
3	3	8
64" 72"	18" 21"	24" 48" 30" 54"
84"	24"	36" 60" 42" 72"



### 4-Shelf Solid Stationary Starter and Add-On Units

Starter units include 2 factory assembled post kits and shelves. Add-On units include 1 factory assembled post kit and shelves.





HEIGHIS	DELIHS	LENGIHS
3	3	8
64"	18"	24" 48"
72"	21"	30" 54"
84"	24"	36" 60"
		42" 72"





### 4-Shelf Vented and Solid Stationary Starter and Add-On Units (3 vented + 1 solid)

Starter units include 2 factory assembled post kits and shelves. Add-On units include 1 factory assembled post kit and shelves. Install solid shelf on bottom to prevent water/cleaning solutions from sloshing up onto stored products. Install solid shelf on top to protect product stored on lower shelves from condensation in cooler.




	HEIGHTS	DEPTHS	LENGTHS	
l	3	3	8	
	64"	18"	24" 48"	_
	72"	21"	30" 54"	
	84"	24"	36" 60"	
			42" 72"	



### 5-Shelf Vented Stationary Starter and Add-On Units

Starter units include 2 factory assembled post kits and shelves. Add-On units include 1 factory assembled post kit and shelves.



HEIGHTS	DEPTHS	LENGTHS
3	3	8
64" 72"	18" 21"	24" 48" 30" 54"
84"	24"	36" 60"
		42" 72"





### 5-Shelf Solid Stationary Starter and Add-On Units

Starter units include 2 factory assembled post kits and shelves. Add-On units include 1 factory

assembled post kit and shelves.



HEIGHT	DEPTHS	LENGTHS
1	3	8
84"	18" 21" 24"	24" 48" 30" 54" 36" 60" 42" 72"






### 5-Shelf Vented and Solid Stationary Starter And Add-On Units (4 vented + 1 solid)

Starter units include 2 factory assembled post kits and shelves. Add-On units include 1 factory

assembled post kit and shelves. Install solid shelf on bottom to prevent water/cleaning solutions from sloshing up onto stored products.

Install solid shelf on top to protect product stored on lower shelves from condensation in cooler.





HEIGHI	DELIH2	LENGIH5
1	3	8
84"	18" 21"	24" 48" 30" 54"
	24"	36" 60" 42" 72"





### 4 or 5-Shelf Vented Mobile Starter Units

Mobile starter units include 2 factory assembled mobile post kits, shelves and 4 premium swivel casters with total locking brake.



WO KO KO KO	
KOKOM	

HEIGHTS*	DEPTHS	LENGTHS
2	3	5
70"	18"	36" 54"
78"	21"	42" 60"
* Includes 5" casters.	24"	48"



Visit the Camshelving Microsite at www.cambro.com/camshelving for product information and pricing on ALL available shelving products. View or download the Camshelving Specification and Price List. Or scan QR code.





## **Camshelving® Elements Series Components**

### **Stationary Post Kits**

Post kit includes 2 unassembled stationary posts, 1 top and bottom post connector and post connector wedges.

Stationary Posts cannot be used to build Mobile Units.




HEIGHTS	DEPTHS
3	4
64"	14"
72"	18"
84"	21"
	24"



### **Mobile Post Kits**

Mobile post kit includes 2 unassembled mobile posts, 1 top and bottom post connector, post connector wedges, and 2 premium swivel casters with total locking brake.

Mobile Posts cannot be used to build Stationary Units.



HEIGHTS	DEPTHS
2	3
70"	18"
70" 78"	18" 21"



### **Vented and Solid Shelf Kits**

For stationary or mobile units. Available as a single shelf or kits of 4 or 5 shelves. Each kit includes stationary or mobile shelf traverses, stationary or mobile shelf traverse dovetails and vented or solid shelf plates.



	Stat	lonary		Mo	bile
	DEPTHS	LEN	GTHS	DEPTHS	LENGTHS
L	4		8	3	5
	14"	24"	*48"	18"	36"
	*18"	30"	54"	21"	42"
	*21"	*36"	60"	24"	48"
	*24"	*42"	72"		54"
					60"
	* 4 or 5 shelf	kits availab	le		

in these sizes only.



### **Shelf Traverses**

Available in single or double packs, stationary or mobile. Use two traverses to add an open shelf for divider bars or drying cradles. Add one stationary traverse onto back posts of a stationary unit for extra support when placing rolling equipment under the first shelf. Traverse dovetails included.



Stationary			Mobile	
Singl	Single Pack Double Pack		Single Pack	Double Pack
LEN	GTHS	LENGTHS LENGTHS		LENGTHS
	8	5	5	5
24"	48"	36"	36"	36"
24" 30"	48" 54"	36" 42"	36" 42"	36" 42"
30"	54"	42"	42"	42"

### **Bottom Shelf Dunnage Stands**

Increase weight bearing capacity on bottom shelf only. Add to any shelf length. Highly recommended for starter units 54" and longer and all corner units, intermediate units and units specified for heavier load volume on and off bottom shelves.







### **Corner Connectors**

Unique patented design ensures maximum shelf space utilization. Use 1 set per shelf to connect starter and add-on units in corners. Connect 4

or 5 intermediate shelves between 2 starter units (2 sets required per shelf). Available as a single set or 8 or 10 set packs.





### **Identification Tags**

Clip onto shelf traverses to clearly identify stored product. Made of highly durable plastic with a clear slide in front panel. Labels included.







### **Wall Fastener**

Use to secure stationary shelving unit to a wall for added safety and stability where required. Made of stainless steel. Screws not included.





### **Seismic Foot**

Secure stationary unit posts directly to the floor for added safety and stability where required. Made of stainless steel. Bolts not included.





### **Premium Caster**

Ideal in all areas of storage, especially coolers, freezers and/or wet areas. Made of highly durable, non-corrosive plastic with a 5" swivel, non-marking thermoplastic rubber wheel. Total locking brake locks both swivel motion and the wheel.





### **Donut Bumper**

Offers added protection during transport and when maneuvering mobile units into place against walls or alongside other units for storage.







### **Shelf Divider**

Stack and separate items stored on shelves. Made of highly durable ABS plastic. Installs directly onto solid or vented shelves. Easily removable for relocating or washing.

HEIGHT <b>1</b>	DEPTHS 3
8"	18" 21"
	24"





### **Shelf Divider Bars**

Create a custom service or storage station for food pans, boxes or dish racks. Install straight or angled dividers directly onto shelf traverses.








### **Tray Sliding Rack**

Holds up to 6 each full size (1826) or 12 half size (1318) sheet pans or trays. Install 1 or more units onto vented shelves, any length. High quality, lightweight aluminum material is safe for use in coolers and freezers. Made from aluminum 6463 (6000 series).







### **Single Shelf Security Cage**

Securely store valuable products on a single shelf. Made of heavy duty, 304 stainless steel for use in any environment. Requires 18" height between shelves. Install on vented shelves only. Lock not included.

24"	42"
1	1
DEPTH	LENGTH



### **Vertical Drying and Storage Cradle**

Modular 7-slot rack designed for drying and storing trays, sheet pans, cutting boards and lids. Installs directly onto shelf traverses. Made of highly durable ABS plastic. Available in single or 3 pack.





### **Vertical Drying and Storage Rack**

Promotes sanitary drying, safe handling and efficient product organization with easy access to product.

Units ship complete with factory assembled mobile post kits, 6 mobile shelf traverses, mobile shelf traverse dovetails, 12 or 15 vertical drying cradles and premium swivel casters with total locking brake. Assembly required.

HEIGHT*	DEPTH	LENGTHS	HOLDS
	<b>1</b>	2	<b>Trays</b>
78"	24"	48" 60"	84

\* Includes 5" casters.







### **Dome Drying and Storage Cradle**

Use to dry and safely store up to 10 patient meal delivery domes or plate covers upright. Installs directly onto shelf traverses. Made of highly durable ABS plastic. Available in single or 5 pack.

DEPTH	
1	
21"	



### **Angled Drying and Storage Cradle**

Uniquely designed cradle holds up to 8 each meal delivery pellets. Also can be used to dry, store and transport food pans and other commercial kitchen ware. Installs directly onto shelf traverses. Made of highly durable ABS plastic. Available in single or 4 pack.





### **Angled Drying and Storage Rack**

Promotes sanitary drying, safe handling and efficient product organization with easy access to product.

Unit ships complete with factory assembled mobile post kits, 8 mobile shelf traverses, mobile shelf traverse dovetails, 16 angled drying cradles and premium swivel casters with total locking brake.

Assembly required.

78"	24"	48"	128 / 16
1	1	1	Pellets, Bases /
HEIGHT*	DEPTH	LENGTH	HOLDS

<sup>\*</sup> Includes 5" casters.



## CAMSHELVING BASICS series

## WHY CHOOSE BASICS?

Just because the budget is tight and storage needs are less rigorous, it doesn't mean that shelving performance and storage efficiencies should be compromised. Basics Series is made from the same high performing, strong composite material as Elements Series and has the same design features. It's lighter in weight and less in cost but still strong enough to handle light to medium storage demands.



All Environments
-36°F TO 190°F

## **Stationary**


















storage needs

**LIGHT** to **MEDIUM** 


weekly deliveries

2 - 5

## **Stationary Unit Sizes**

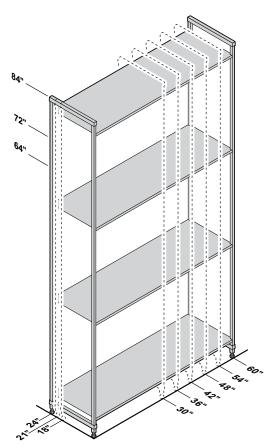

## **4 Shelf Unit Weight Bearing Chart**

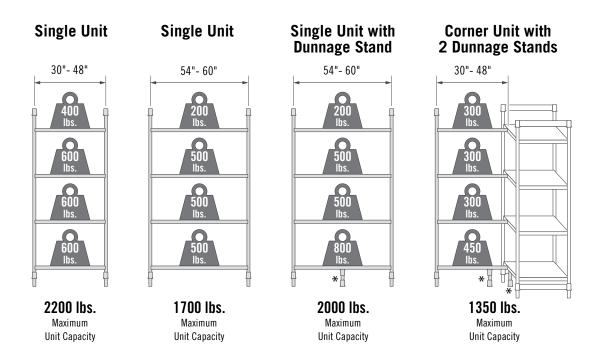

<sup>\*</sup> Dunnage Stands add stability and increase weight bearing capacity on bottom shelf only. Add to any shelf length. Highly recommended for Starter Units 54" and longer, all Corner Units, U-Shape Units and units specified for heavier loads (see page 10).

## **Camshelving® Basics Series**


### Starter, and Add-On Units

These units make ordering easy and saves time and labor during installation. Units ship complete in one box. Post kits are pre-assembled at the factory, speeding up on site set up.



### 4-Shelf Vented Stationary Starter and Add-On Units

Starter units include 2 factory assembled post kits and shelves. Add-On units include 1 factory assembled post kit and shelves.



HEIGHTS	DEPTHS	LENGTHS
3	3	6
64"	18"	30" 48"
72"	21"	36" 54"
84"	24"	42" 60"



### 4-Shelf Solid Stationary Starter and Add-On Units

Starter units include 2 factory assembled post kits and shelves. Add-On units include 1 factory assembled post kit and shelves.



HEIGHTS	DEPTHS	LENGTHS
3	3	6
64"	18"	30" 48"
72"	21"	36" 54"
84"	24"	42" 60"



### 4-Shelf Vented and Solid Stationary Starter and Add-On Units (3 vented + 1 solid)

Starter units include 2 factory assembled post kits and shelves.
Add-On units include 1 factory assembled post kit and shelves.
Install solid shelf on bottom to prevent water/cleaning solutions from sloshing up onto stored products. Install solid shelf on top to protect product stored on lower shelves from condensation in cooler.



HEIGHTS	DEPTHS	LENGTHS
3	3	6
64"	18"	30" 48"
72"	21"	36" 54"
84"	24"	42" 60"



38

### 5-Shelf Vented Stationary Starter and Add-On Units

Starter units include 2 factory assembled post kits and shelves. Add-On units include 1 factory assembled post kit and shelves.



HEIGHTS	DEPTHS	LENG	THS
3	3	6	
64"	18"	30"	48"
72"	21"	36"	54"
84"	24"	42"	60"



### 5-Shelf Solid Stationary Starter and Add-On Units

Starter units include 2 factory assembled post kits and shelves. Add-On units include 1 factory assembled post kit and shelves.



HEIGHT	DEPTHS	LENG	THS
1	3	6	
84"	18" 21" 24"	30" 36" 42"	48" 54" 60"



### 5-Shelf Vented and Solid Stationary Starter And Add-On Units (4 vented + 1 solid)


Starter units include 2 factory assembled post kits and shelves.

Add-On units include 1 factory assembled post kit and shelves.

Install solid shelf on bottom to prevent water/cleaning solutions from sloshing up onto stored products.

Install solid shelf on top to protect product stored on lower shelves from





HEIGHI	DELIHZ	LENG	142
1	3	6	
84"	18" 21" 24"	30" 36" 42"	48" 54" 60"





condensation in cooler.

Visit the Camshelving Microsite at www.cambro.com/camshelving for product information and pricing on ALL available shelving products. View or download the Camshelving Specification and Price List. Or scan QR code.



## **Camshelving® Basics Series Components**

### **Stationary Post Kits**

Post kit includes 2 unassembled stationary posts, 1 top and bottom post connector and post connector wedges.



HEIGHTS	DEPTHS
3	3
64"	18"
72"	21"
84"	24"



### **Vented and Solid Shelf Kits**

Available as a single shelf or kits of 4 or 5 shelves. Each kit includes shelf traverses, shelf traverse dovetails and vented or solid shelf plates.



DEPTHS	LENGTHS
3	6
*18"	30"
*21"	*36"
*24"	*42"
	*48"
	54"
	60"

<sup>\* 4</sup> or 5 shelf kits available in these sizes only.





### **Shelf Traverses**

Add one traverse onto back posts for extra support when placing rolling equipment under the first shelf. Traverse dovetails included.



Single Pack
LENGTHS
6
30"
36"
42"
48"
54"
60"

Ships in

**BASICS** 

### **Camshelving® Basics Series Accessories**

### **Bottom Shelf Dunnage Stands**

Increase weight bearing capacity on bottom shelf only. Add to any shelf length. Highly recommended for starter units 54" and longer and all corner units, intermediate units and units specified for heavier load volume on and off bottom shelves.







#### **Corner Connectors**

Unique patented design ensures maximum shelf space utilization. Use 1 set per shelf to connect starter and add-on units in corners. Connect 4

or 5 intermediate shelves between 2 starter units (2 sets required per shelf). Available as a single set or 8 or 10 set packs.





### **Identification Tag**

Clip onto shelf traverses to clearly identify stored product. Made of highly durable plastic with a clear slide in front panel. Labels included.







### **Wall Fastener**

Use to secure stationary shelving unit to a wall for added safety and stability where required. Made of stainless steel. Screws not included.





### **Seismic Foot**

Secure stationary unit posts directly to the floor for added safety and stability where required. Made of stainless steel. Bolts not included.





## **Additional Camshelving® Accessories**

### Camrack® Open End Tray Rack

Open end on one side for easy placement and removal of shelf plates.

HOLDS
Shelf Plates



### Camshelving® Wall Shelves

Features virtually indestructible I-beam supports that hold up to 150 lbs. per shelf. Durable polypropylene withstands temperatures up to 190°F, and will not rust or corrode. Includes all hardware for installation. Easy to remove and clean without tools.

DEPTHS 2	LENGTHS 2	
14" 18"	36" 48"	



### **Shelf Extenders**

Convert empty wall space into a functional, vertical storage area.
Peg strips withstand temperatures up to 190°F, and will not rust or corrode.





(NSF.)

Weight



### **S-Series Dunnage Racks**

Keep frozen, cold or dry inventory 12" safely off the floor. Heavy duty polypropylene is safe to -36°F, and will not rust, corrode or bend.

HEIGHT	DEPTH	LENGTHS	CAPACITY
1	1	4	LBS
12"	21"	30" 36"	1500 3000
		48"	
		60"	




### Camlink® Connectors

Securely lock dunnage racks together for greater stability.





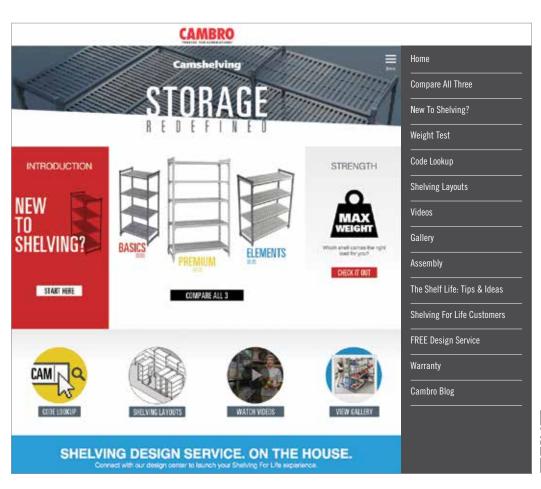

Visit the Camshelving
Microsite at www.cambro.
com/camshelving for
product information and
pricing on ALL available
shelving products. View or
download the Camshelving
Specification and Price
List. Or scan QR code.











