



Project Name: \_\_\_\_\_

Location: \_\_\_\_\_

Item #: \_\_\_\_\_ Qty: \_\_\_\_\_

Model: \_\_\_\_\_

# TOP MOUNT REACH-IN REFRIGERATORS

MODEL:  MCRT-23FDHC  MCRT-49FDHC  MCRT-72FDHC



MCRT-23FDHC



MCRT-49FDHC



MCRT-72FDHC


Maxx Cold reach-in refrigerators are constructed from stainless steel, engineered with digital controls and polyurethane insulation for optimal temperature control and easy maintenance. Available in 1, 2 and 3 door configurations, each model features recessed handles, door locks and PE coated wire shelving with storage space for full size sheet pans.

## FEATURES AND CONSTRUCTION

- Stainless steel exterior and interior
- Self-closing door(s) with easy to grip recessed handle(s)
- Field reversible door on single door model
- Automatic interior lighting
- Lock and key set for security
- Adjustable heavy-duty wire shelves (3 per section/door)
- Four (4) or six (6) 4" diameter swivel casters
- Electronic control panel with digital display
- Automatic defrost system
- Open door alert beeps if door has been open for five minutes
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Polyurethane foam insulation provides outstanding thermal regulation and energy efficiency

## ELECTRIC

115V / 60Hz / 1Ph  
(230V / 50-60Hz / 1Ph is available as an option)  
6' (2m) NEMA 5-15P cord set included



NEMA 5-15P

## 3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471



Meets Energy Star Guidelines

## TEMPERATURE

Holding temperature ..... 33°F to 41°F (1°C to 5°C)


- Digital control system maintains optimum temperature
- Large evaporator and condenser for quick cooling and greater efficiency

## MAXX COLD WARRANTY (USA / CANADA)

Contact Maxx Cold for warranty statement at  
TechnicalServices@TheLegacyCompanies.com or 877.368.2797



# MAXX COLD TOP MOUNT REACH-IN REFRIGERATORS

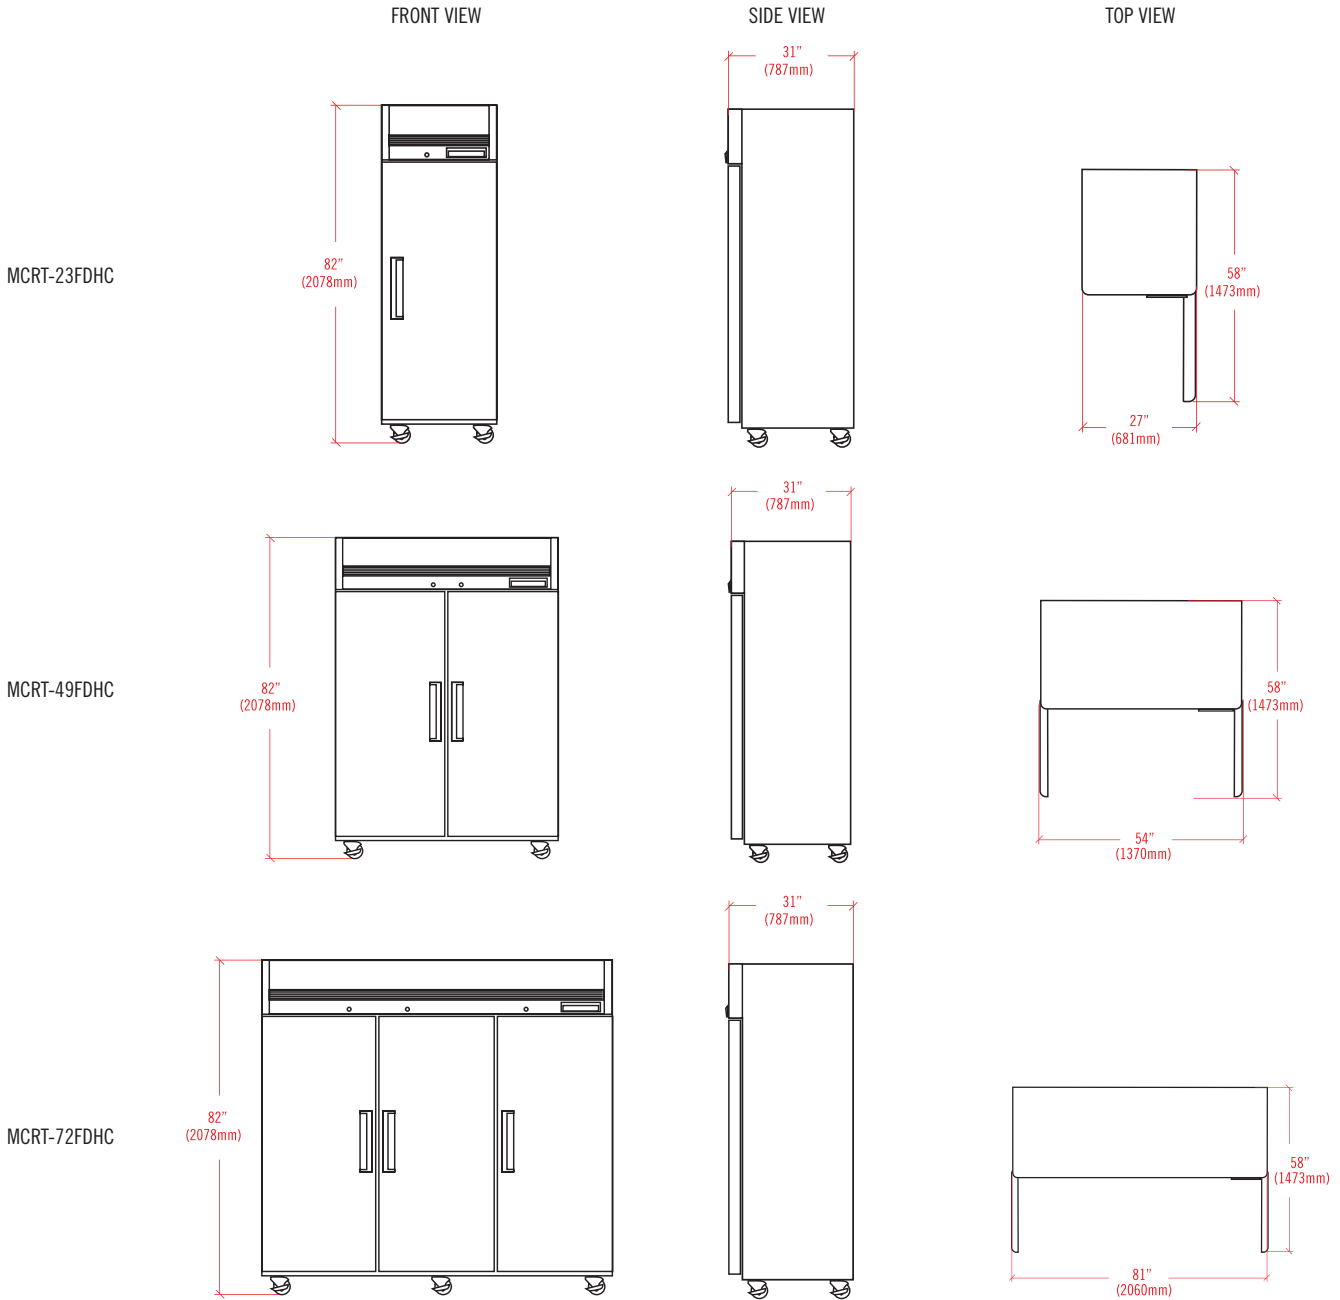

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NET CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	HP	UNIT WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	ELECTRICAL
MCRT-23FDHC	27" x 31" x 82" (681 x 787 x 2078 mm)	22.8" x 24.1" x 53.7" (578 x 613 x 1364 mm)	18.9 Cu Ft (535 L)	33°F to 41°F (1°C to 5°C)	3.0A	1/4	264 lbs (120 kg)	R-290a 2.61 oz (74 g)	1 / 3	115V / 60Hz / 1Ph
MCRT-49FDHC	54" x 31" x 82" (1370 x 787 x 2078 mm)	49.8" x 24.1" x 53.7" (1264 x 613 x 1364 mm)	42.8 Cu Ft (1212 L)	33°F to 41°F (1°C to 5°C)	3.2A	1/4	388 lbs (190 kg)	R-290a 3.67 oz (104 g)	2 / 6	115V / 60Hz / 1Ph
MCRT-72FDHC	81" x 31" x 82" (2060 x 787 x 2078 mm)	77.3" x 24.1" x 53.7" (1963 x 613 x 1364 mm)	66.7 Cu Ft (1889 L)	33°F to 41°F (1°C to 5°C)	6.3A	1/2	567 lbs (257 kg)	R-290a 5.22 oz (148 g)	3 / 9	115V / 60Hz / 1Ph

## INSTALLATION

- Shorter caster options are available to lower the overall height of the unit

07/24/20

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.