

UNDERCOUNTER REFRIGERATORS

MODEL: MXCR27UHC MXCR48UHC MXCR60UHC MXCR72UHC



MXCR27UHC



MXCR48UHC



MXCR60UHC



MXCR72UHC


Maxx Cold stainless steel Undercounter Refrigerators are designed to provide the user with maximum storage, energy savings and cold, accurate temperatures. Our undercounter models allow for easy accessibility, optimum capacity and flexibility for quick and efficient food preparation.

FEATURES AND CONSTRUCTION

- Durable, easy to clean stainless steel exterior
- Painted aluminum interior
- Easy to grip recessed door handles
- Adjustable heavy-duty wire shelves (1 per section/door)
- Equipped with four (4) 3" swivel casters
- Solid state digital control system
- LED temperature display
- Automatic defrost system
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Urethane insulated walls and doors
- Accommodates full-size sheet pans

ELECTRIC

115V / 60Hz / 1Ph
 (230V / 50-60Hz / 1Ph is available as an option)
 6' (2m) NEMA 5-15P cord set included



NEMA 5-15P

NET STORAGE CAPACITY

MXCR27UHC.....	6.5 Cu Ft (184 L)
MXCR48UHC.....	12 Cu Ft (340 L)
MXCR60UHC.....	15.5 Cu Ft (439 L)
MXCR72UHC.....	18 Cu Ft (510 L)

3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471



Meets Energy Star Guidelines
 MXCR27UHC / 48UHC / 60UHC



Zero Ozone
 Depletion Potential



DOE 2018 Compliant


MAXX COLD WARRANTY (USA / CANADA)

Contact Maxx Cold for warranty statement at
 TechnicalServices@TheLegacyCompanies.com or 877.368.2797

TEMPERATURE

Holding temperature 33°F to 41°F (1°C to 5°C)

- Efficient forced-air refrigeration system

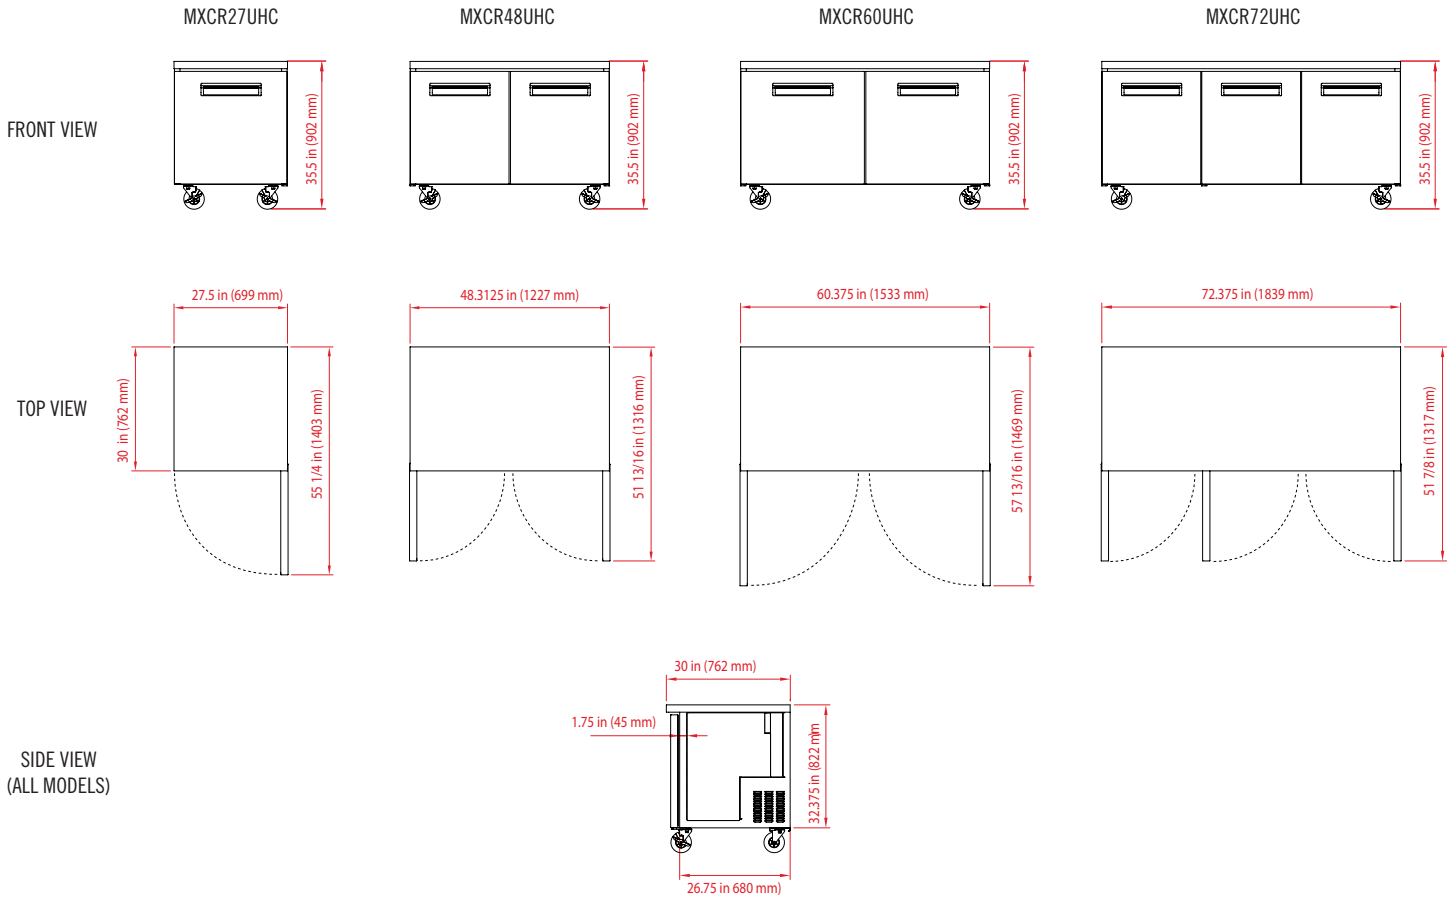

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NET CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	SHIPPING WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	ELECTRICAL
MXCR27UHC	27.5" x 30" x 35.5" (699 x 762 x 911 mm)	22.9" x 18.8" x 24.5" (602 x 478 x 622 mm)	6.5 Cu Ft (184 L)	33°F to 41°F (1°C to 5°C)	1.5A	220 lbs (100 kg)	R-600a 2.47 oz (68 g)	1 / 1	115V / 60Hz / 1Ph
MXCR48UHC	48.3125" x 30" x 35.5" (1227 x 762 x 911 mm)	43.5" x 18.8" x 24.5" (1104 x 478 x 622 mm)	12 Cu Ft (340 L)	33°F to 41°F (1°C to 5°C)	3.0A	304 lbs (140 kg)	R-600a 2.65 oz (75 g)	2 / 2	115V / 60Hz / 1Ph
MXCR60UHC	60.375" x 30" x 35.5" (1533 x 762 x 911 mm)	56.2" x 18.8" x 24.5" (1428 x 478 x 622 mm)	15.5 Cu Ft (439 L)	33°F to 41°F (1°C to 5°C)	3.0A	352 lbs (160 kg)	R-600a 2.82 oz (80 g)	2 / 2	115V / 60Hz / 1Ph
MXCR72UHC	72.375" x 30" x 35.5" (1839 x 762 x 911 mm)	66.9" x 18.8" x 24.5" (1700 x 478 x 622 mm)	18 Cu Ft (510 L)	33°F to 41°F (1°C to 5°C)	3.5A	430 lbs (195 kg)	R-290a 4.59 oz (130 g)	3 / 3	115V / 60Hz / 1Ph

INSTALLATION

- Shorter caster options are available to lower the overall height of the unit to satisfy ADA or other low profile requirements